


Announcing...

The **DMX-IT 524**

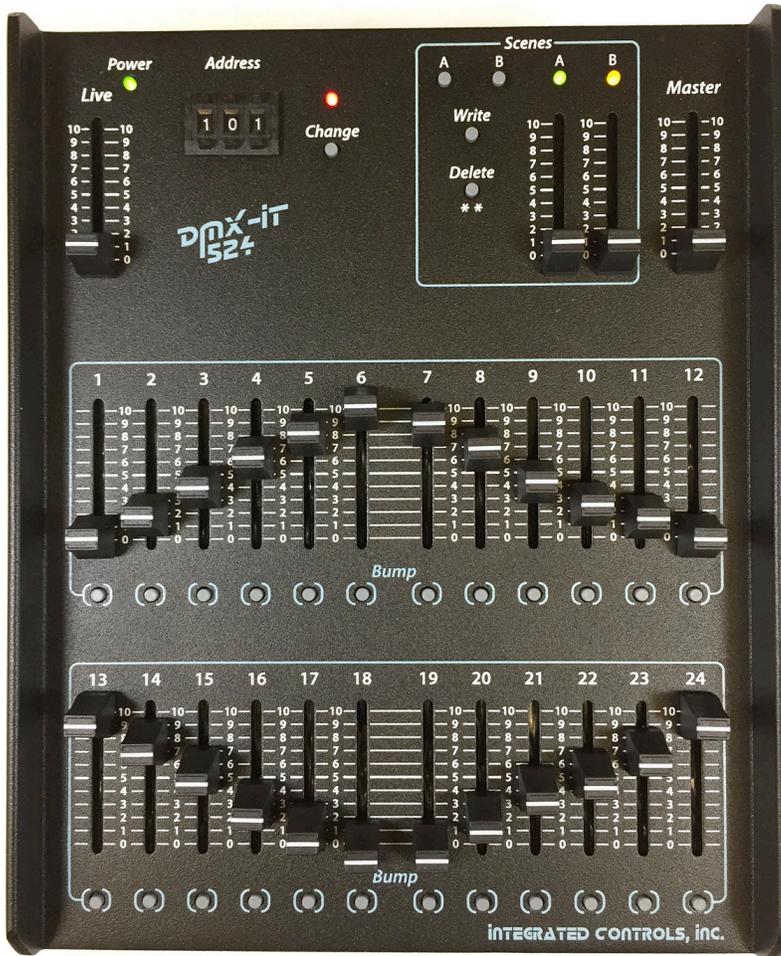

We are excited to announce the introduction of the **DMX-IT 524**.

The **DMX-IT 524** model doubles the channel space and enhances the features of the 12 channel **DMX-IT 512** and **DMX-IT 512e**.

The **DMX-IT 524** features an updated super rugged design and preserves the spirit of simplicity and small size of the 12 channel units.

FEATURES

Fast to operate, fast frame rates for LED lighting and enough channels to control sophisticated multi channel lighting instruments and panels.

Memory – Two separate scenes of full level memory at independent addresses and each with its own Scene Master. Each scene can be bumped on / off instantly.

A Live Master is provided which is independent of the scene masters.

The grand Master controls all levels simultaneously.

An Address mismatch LED indicates when the address setting does not match the current Live address.

The faders are protected by integral double thick side walls.



The small size and light weight allow hand held operation as with the earlier models.



Rechargeable internal Li-ion battery featuring days of operation on a single charge.
Charging status LED, Low battery status LED.

Simultaneous charging and operation from either the ultra small AC adapter (included) or a Micro USB B cable connected to a portable power bank or any USB power source.

USB A connector provides a power output for external gear.



VESA mount threads provided on the bottom allow optional creative mounting using a huge variety of off the shelf mounting hardware: mic stands, monitor mounts, etc.



AC Adapter - Ultra mini size
Inp: 100-240VAC, Output: 5Vdc @1Amp
DC Connector: 4.0 x 1.7 (EIAJ-2)
Level 6 compliant
Model: PS-1512

Dimensions:
W, H, D Front / Rear: 6.1", 8.4", 1.6/2.4" (17.0cm, 212cm, 4 / 6 cm)
Weight 1.8lbs (0.8kg), in carton 2.5lbs (1.1kg), shipping wt 3.2lbs (1.4kg)
Firmware version is indicated by a label on the bottom.

Model Number: 750-0824, Model Name: DMX-iT 524